

# PV Disconnect 1000-40-5

Five string connection box with DC Disconnect Switch

## ORDER INFORMATION

- Item no.: 19-000115
- Product name: PV Disconnect 1000-40-5

## FEATURES

- Simple and cost effective unit to connect up to five module strings
- Includes an appropriate DC rated disconnect switch
- Designed for PSk2 / PSk pump systems
- Used as part of a professional system installation



## TECHNICAL DATA

- Wiring of up to 5 PV-strings in parallel
- DC rated disconnect switch enclosed
- Enclosure class IP 54
- Meets the requirements for CE

### PV Disconnect 1000-40-5

Max. voltage	1,000 V DC (Uoc) 880 V DC (Ump)
Max. current per string	40 A
Max. total current	40 A
Max. no. of strings	5
String cable size	4 - 10mm <sup>2</sup>
Output cable size	4 - 16mm <sup>2</sup>

## RELATED PRODUCTS


### PV Combiner 1000-125-4

- Connection Box for parallel wiring of two or more PV Disconnect 1000-40-5
- Item no.: 19-000116


### PV Protect 1000-125

- Surge protection device for PV systems
- Item no.: 19-000117

## DIMENSION/WEIGHT [mm]

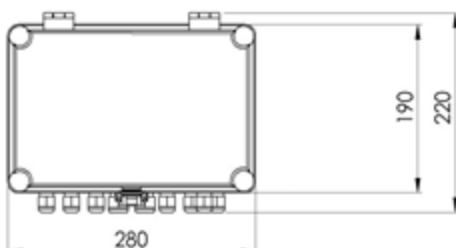

PG cable glands  
(2x PG11 10x M16)



Net. Weight: 2,50kg

**BERNT LORENTZ GmbH & Co. KG**  
 Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany  
 Tel +49 (0)4193 8806-700, [www.lorentz.de](http://www.lorentz.de)

**Sun. Water. Life.**

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations